

1. Before use

The SvoëMesto Kayfun 5 is a rebuildable tank atomizer specifically designed using e-liquid for electronic cigarettes. Before use you must install a coil made intended for usage in electronic cigarettes..

ATTENTION:

Do not use oils or oil based fluids with the atomizer.

This manual is meant as a brief overview on the general functionality of the SvoëMesto Kayfun 5. If you have no experience using a rebuildable atomizer or creating coils, please consult your local vendor.


Further information and languages at www.svoemesto.de.

2. Application

The SvoëMesto Kayfun 5's recommended use is for coils with a minimum resistance of 0.5 ohm and an electric input from 10 watts to 40 watts. Please use the atomizer responsibly and the coils you've created at your own risk.


3. Instructions for use

3.1 Accessing the deck




Step 1

Flip the atomizer upside down, when the tank is filled.



Step 2

Unscrew the base counter-clockwise




Step 3

Remove the base to access the deck.

3.2. Installing coil and wick

The coil is placed diagonally between the build screws and approx. 1.5 mm – 2 mm above the air outlet, so that air can smoothly flow around the coil. The ends of the wire are placed under the build screws and then clamped underneath them.

The overhanging ends of the wick should be placed in the empty spaces beneath the terminals, so that they lay above the liquid channels. Before assembling the atomizer it is recommended to saturate the wick with e-liquid

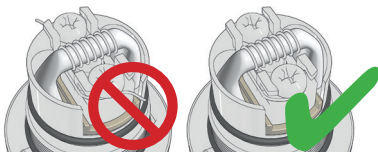


ATTENTION:

For your own safety please note the following

- The coil has to be connected with one end at the plus terminal, with the other end at the minus terminal.
- The exceeding ends of the wire have to be cut flush with the terminals and must not stick out of the build deck. Otherwise, this may cause a short circuit.
- The coil must not touch the deck itself.


3.3. Setting airflow

The Kayfun 5 has four different airflow settings. To adjust it, slightly open liquid control to allow the airflow ring to move freely. Lift the airflow ring up and turn it to the position you like.

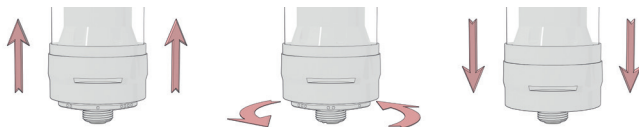

3.4. Filling and operating the liquid flow control.

The Kayfun 5 has a liquid flow control, which can be set continuously to restrict the liquid flow to your coil. It has to be shut completely before refilling the tank.

- To close the liquid control completely, grab the base and turn the tank in a clockwise movement until it stops.
 - To fill the tank, the SvoëMesto Kayfun 5 has to be assembled completely including coil and wick. Open the fill port at the top, fill the tank along the sides until the liquid level reaches the upper end of the glass-tank-section. Close the fill port.
 - To open the liquid control completely, grab the base and turn the tank in a counter-clockwise motion two full turns.
 - To fine tune your liquid flow, you can set the liquid control to any point in-between fully open and closed.
- 

4. Warranty

The manufacturer's warranty is one year on all stainless steel parts. Excluded from warranty are all plastic components such as tanks and insulators, glass tanks and o-rings.

5. Disclaimer

With the SvoëMesto Kayfun 5, please use original SvoëMesto accessories only. The manufacturer accepts no liability for any third-party accessories or issues which may have been caused or exacerbated by their use.

6. Warnings

- Before use please read the manual carefully!
- Please keep the atomizer dry!
- Do not use the atomizer for other purposes than intended!
- Connect the atomizer to a power source that is suitable for its intended use!
- Using the atomizer on high voltages or without a fluid can damage the atomizer. The manufacturer accepts no liability for atomizers that were damaged during use.
- Using the atomizer incorrectly not only can lead to a defect of the atomizer, but also cause fire.
- Keep the atomizer away from heat sources.
- Not suitable for children. Please keep the atomizer away from children!



www.svoemesto.de

© 2016 SMTec GmbH